



**Model: 24030CCK30/W33**

Basic size of  
 mm

d:	150
D:	225
B:	75

The basic rated load is  
 kN

trends C:	655
static state Co:	1040
Fatigue load limit	100
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	1800
limit speed:	2600
quality:	10.5

model

Column hole:	*24030CC/W33
conical bore:	*24030CCK30/W33
	3

Dimensions are  
 mm



d:	150
d <sub>2</sub> ~ :	165
D1 ~ :	197
b:	5.5
k:	3
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	161
Da the max:	214
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.3
----	-----

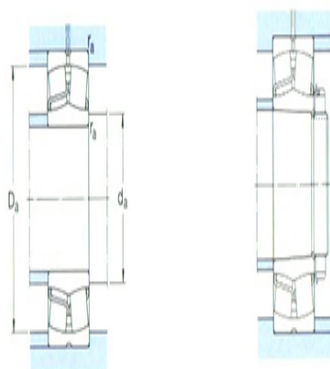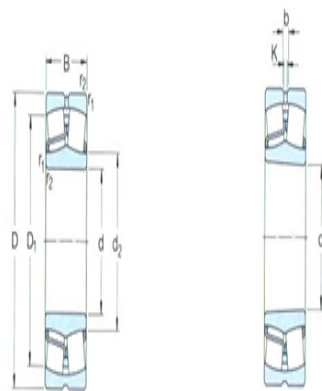

Y1:	2.3
Y2:	3.4
Y0:	2.2