



Model: 24130CCK30/W33

Basic size of
mm

d:	150
D:	250
B:	100

The basic rated load is
kN

trends C:	1020
static state Co:	1530
Fatigue load limit	146
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	1500
limit speed:	2200
quality:	20

model

Column hole:	*24130CC/W33
conical bore:	*24130CCK30/W33
	3

Dimensions are
mm



d:	150
d ₂ ~ :	169
D1 ~ :	211
b:	8.3
k:	4.5
r _{1,2} the min:	2.1

Shoulder gear and chamfer size
mm

d _a the min:	162
Da the max:	238
r _a the max:	2

Calculation coefficient

e:	0.37
----	------

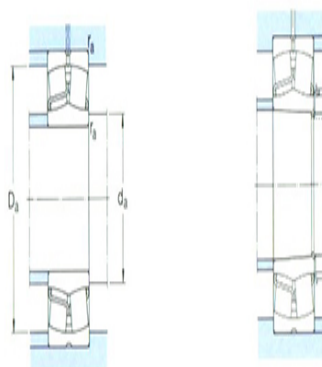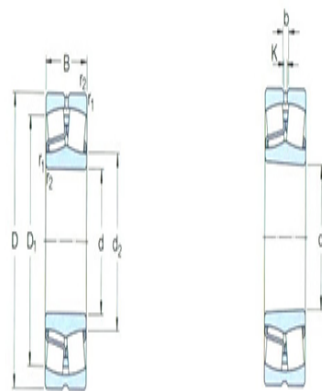

Y1:	1.8
Y2:	2.7
Y0:	1.8