



Model: 23032CC/W33

Basic size of
 mm

d:	160
D:	240
B:	60

The basic rated load is
 kN


trends C:	585
static state Co:	880
Fatigue load limit Pu:	83

Rated rotation speed is
 r/min

Refer to the speed:	2400
limit speed:	3000
quality:	9.7


model

Column hole:	*23032CC/W33
conical bore:	*23032CCK/W33

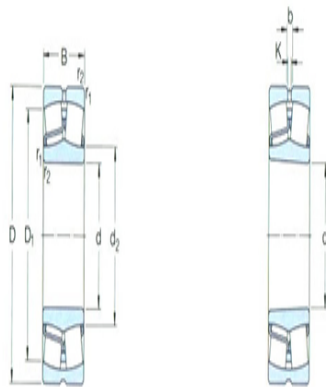

Dimensions are
 mm

d:	160
d ₂ ~ :	180
D1 ~ :	217
b:	11.1
k:	6
r _{1,2} the min:	2.1

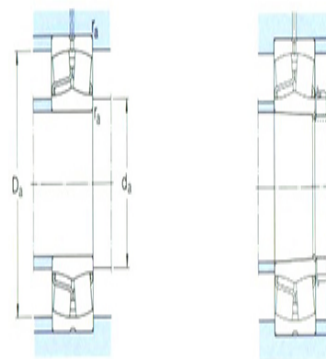

Shoulder gear and chamfer size
 mm

d _a the min:	171
Da the max:	229
r _a the max:	2

Calculation coefficient

e:	0.22
Y1:	3

Y2:	4.6
Y0:	2.8