



**Model: 24032CC/W33**

Basic size of  
 mm

d:	160
D:	240
B:	80

The basic rated load is  
 kN

trends C:	750
static state Co:	1200
Fatigue load limit	114
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	1700
limit speed:	2400
quality:	13

model

Column hole:	*24032CC/W33
conical bore:	*24032CCK30/W33
	3

Dimensions are  
 mm



d:	160
d <sub>2</sub> ~ :	176
D1 ~ :	211
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	171
Da the max:	229
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.3
----	-----

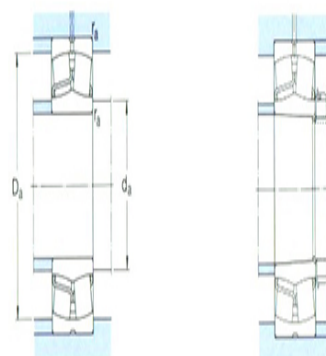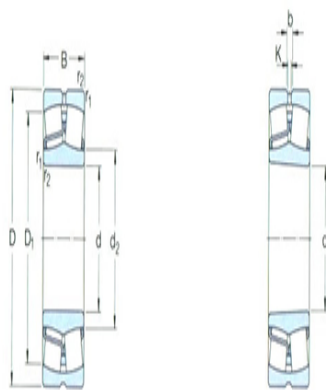

Y1:	2.3
Y2:	3.4
Y0:	2.2