



### Model: 23132CC/W33

Basic size of  
mm

d:	160
D:	270
B:	86

The basic rated load is  
kN

trends C:	980
static state Co:	1370
Fatigue load limit Pu:	129

Rated rotation speed is  
r/min

Refer to the speed:	1900
limit speed:	2400
quality:	20.5

model

Column hole:	*23132CC/W33
conical bore:	*23132CCK/W33

Dimensions are  
mm



d:	160
d <sub>2</sub> ~ :	184
D1 ~ :	234
b:	13.9
k:	7.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	172
Da the max:	258
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.3
Y1:	2.3

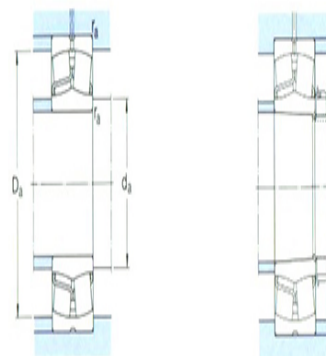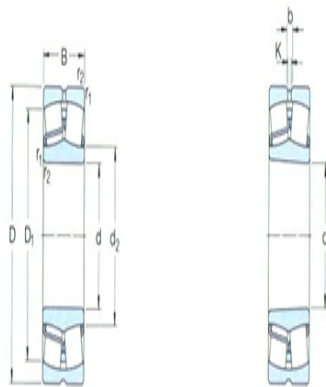

Y2:	3.4
Y0:	2.2