



Model: 23034CC/W33

Basic size of
mm

d:	170
D:	260
B:	67

The basic rated load is
kN

trends C:	710
static state Co:	1060
Fatigue load limit Pu:	100

Rated rotation speed is
r/min

Refer to the speed:	2200
limit speed:	2800
quality:	13

model

Column hole:	*23034CC/W33
conical bore:	*23034CCK/W33

Dimensions are
mm



d:	170
d ₂ ~ :	191
D1 ~ :	232
b:	11.1
k:	6
r _{1,2} the min:	2.1

Shoulder gear and chamfer size
mm

d _a the min:	181
Da the max:	249
r _a the max:	2

Calculation coefficient

e:	0.23
Y1:	2.9

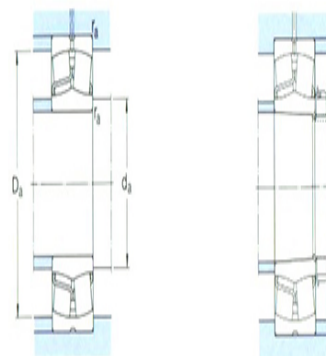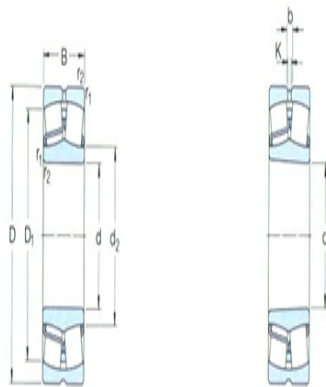

Y2:	4.4
Y0:	2.8