



**Model: 24034CC/W33**

Basic size of  
 mm

d:	170
D:	260
B:	90

The basic rated load is  
 kN

trends C:	930
static state Co:	1460
Fatigue load limit	137
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	1600
limit speed:	2400
quality:	17.5

model

Column hole:	*24034CC/W33
conical bore:	*24034CCK30/W33
	3

Dimensions are  
 mm



d:	170
d <sub>2</sub> ~ :	188
D1 ~ :	226
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	181
Da the max:	249
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.33
----	------

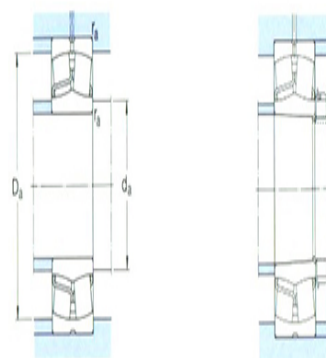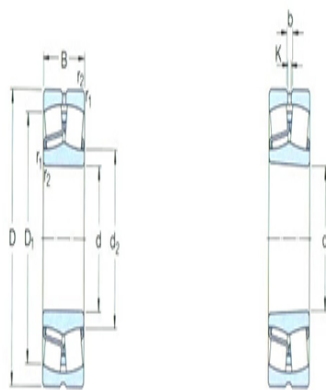

Y1:	2
Y2:	3
Y0:	2