



Model: 23234CC/W33

Basic size of
mm

d:	170
D:	310
B:	110

The basic rated load is
kN

trends C:	1400
static state Co:	1930
Fatigue load limit Pu:	173

Rated rotation speed is
r/min

Refer to the speed:	1400
limit speed:	2000
quality:	37.5

model

Column hole:	*23234CC/W33
conical bore:	*23234CCK/W33

Dimensions are
mm



d:	170
d ₂ ~ :	200
D1 ~ :	261
b:	13.9
k:	7.5
r _{1,2} the min:	4

Shoulder gear and chamfer size
mm

d _a the min:	187
Da the max:	293
r _a the max:	3

Calculation coefficient

e:	0.35
Y1:	1.9

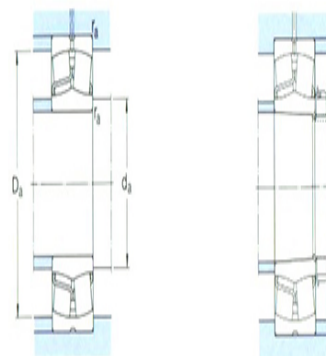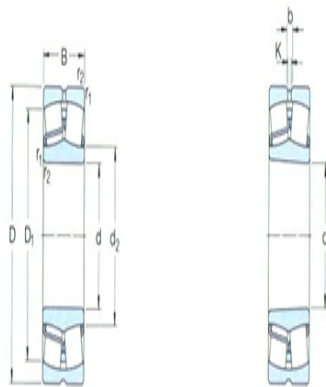

Y2:	2.9
Y0:	1.8