



Model: 23936CC/W33

Basic size of
 mm

d:	180
D:	250
B:	52

The basic rated load is
 kN

trends C:	431
static state Co:	830
Fatigue load limit Pu:	76.5

Rated rotation speed is
 r/min

Refer to the speed:	2200
limit speed:	2800
quality:	7.9

model

Column hole:	23936CC/W33
conical bore:	23936CCK/W33

Dimensions are
 mm



d:	180
d ₂ ~ :	199
D1 ~ :	231
b:	5.5
k:	3
r _{1,2} the min:	2

Shoulder gear and chamfer size
 mm

d _a the min:	189
Da the max:	241
r _a the max:	2

Calculation coefficient

e:	0.18
Y1:	3.8

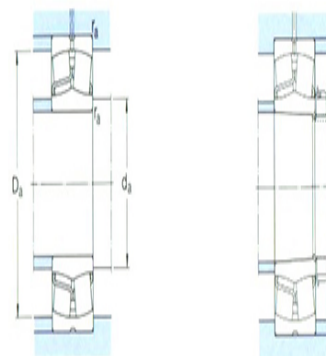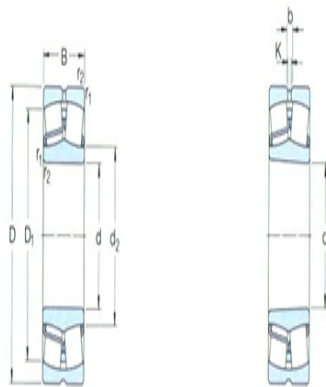

Y2:	5.6
Y0:	3.6