



**Model: 24036CC/W33**

Basic size of  
 mm

d:	180
D:	280
B:	100

The basic rated load is  
 kN

trends C:	1080
static state Co:	1730
Fatigue load limit	156
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	1500
limit speed:	2200
quality:	23

model

Column hole:	*24036CC/W33
conical bore:	*24036CCK30/W3 3

Dimensions are  
 mm



d:	180
d <sub>2</sub> ~ :	201
D1 ~ :	243
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	191
Da the max:	269
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.33
----	------

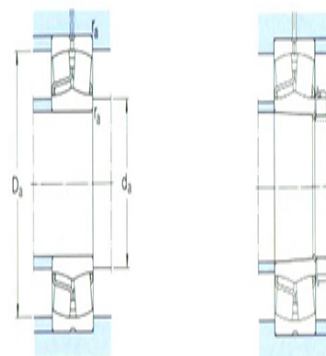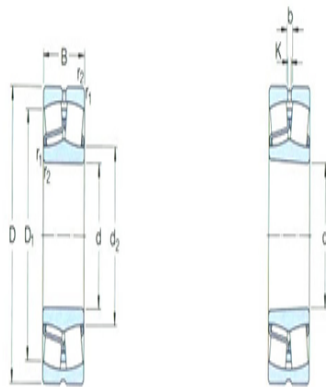

Y1:	2
Y2:	3
Y0:	2