



**Model: 23136CC/W33**

Basic size of  
 mm

|    |     |
|----|-----|
| d: | 180 |
| D: | 300 |
| B: | 96  |

The basic rated load is  
 kN

|                        |      |
|------------------------|------|
| trends C:              | 1200 |
| static state Co:       | 1760 |
| Fatigue load limit Pu: | 160  |

Rated rotation speed is  
 r/min

|                     |      |
|---------------------|------|
| Refer to the speed: | 1700 |
| limit speed:        | 2200 |
| quality:            | 28   |

model

|               |               |
|---------------|---------------|
| Column hole:  | *23136CC/W33  |
| conical bore: | *23136CCK/W33 |

Dimensions are  
 mm



|                           |      |
|---------------------------|------|
| d:                        | 180  |
| d <sub>2</sub> ~ :        | 207  |
| D1 ~ :                    | 259  |
| b:                        | 13.9 |
| k:                        | 7.5  |
| r <sub>1,2</sub> the min: | 3    |

Shoulder gear and chamfer size  
 mm

|                         |     |
|-------------------------|-----|
| d <sub>a</sub> the min: | 194 |
| Da the max:             | 286 |
| r <sub>a</sub> the max: | 2.5 |

Calculation coefficient

|     |     |
|-----|-----|
| e:  | 0.3 |
| Y1: | 2.3 |

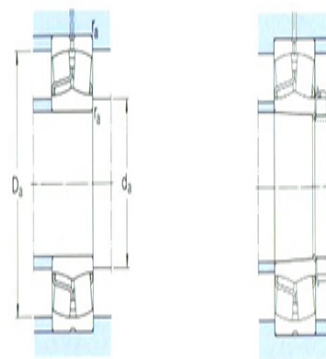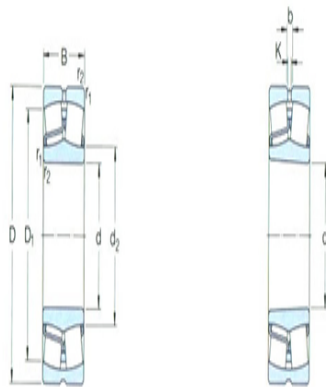

|     |     |
|-----|-----|
| Y2: | 3.4 |
| Y0: | 2.2 |