



**Model: 23038CC/W33**

Basic size of  
mm

d:	190
D:	290
B:	75

The basic rated load is  
kN


trends C:	865
static state Co:	1340
Fatigue load limit Pu:	122

Rated rotation speed is  
r/min

Refer to the speed:	1900
limit speed:	2400
quality:	18

model

Column hole:	*23038CC/W33
conical bore:	*23038CCK/W33

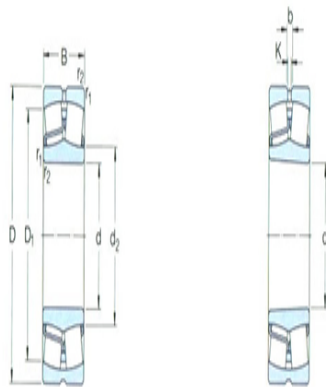

Dimensions are  
mm


d:	190
d <sub>2</sub> ~ :	216
D1 ~ :	261
b:	13.9
k:	7.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	201
Da the max:	279
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.23
Y1:	2.9

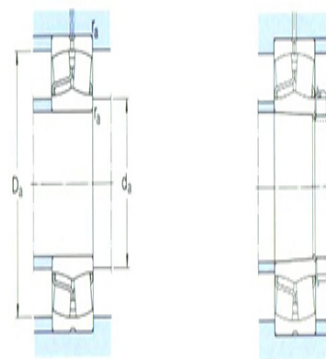

Y2:	4.4
Y0:	2.8