



Model: 23138CC/W33

Basic size of  
mm

d:	190
D:	320
B:	104

The basic rated load is  
kN


trends C:	1370
static state Co:	2080
Fatigue load limit Pu:	183

Rated rotation speed is  
r/min

Refer to the speed:	1500
limit speed:	2000
quality:	35


model

Column hole:	*23138CC/W33
conical bore:	*23138CCK/W3 3

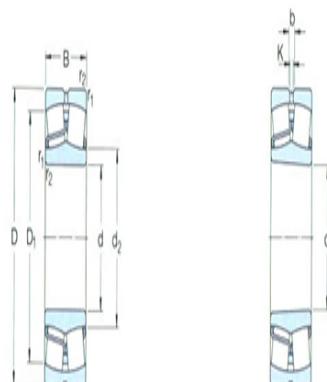

Dimensions are  
mm

d:	190
$d_2 \sim :$	220
$D_1 \sim :$	275
b:	13.9
k:	7.5
$r_{1,2}$ the min:	3

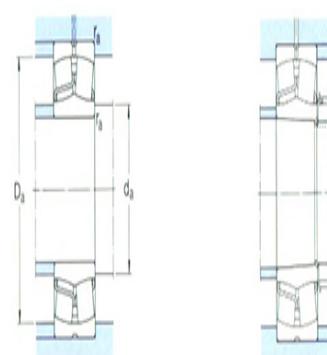

Shoulder gear and chamfer size  
mm

$d_a$ the min:	204
$D_a$ the max:	306
$r_a$ the max:	2.5

Calculation coefficient

e:	0.31
Y1:	2.2

Y2:	3.3
Y0:	2.2