



Model: 22338CC/W33

Basic size of
 mm

| | |
|----|-----|
| d: | 190 |
| D: | 400 |
| B: | 132 |

The basic rated load is
 kN

| | |
|------------------------|------|
| trends C: | 2120 |
| static state Co: | 2650 |
| Fatigue load limit Pu: | 208 |

Rated rotation speed is
 r/min

| | |
|---------------------|------|
| Refer to the speed: | 1200 |
| limit speed: | 1600 |
| quality: | 82.5 |

model

| | |
|---------------|---------------|
| Column hole: | *22338CC/W33 |
| conical bore: | *22338CCK/W33 |

Dimensions are
 mm



| | |
|---------------------------|------|
| d: | 190 |
| d ₂ ~ : | 236 |
| D1 ~ : | 333 |
| b: | 22.3 |
| k: | 12 |
| r _{1,2} the min: | 5 |

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|-----|
| d _a the min: | 210 |
| Da the max: | 380 |
| r _a the max: | 4 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.35 |
| Y1: | 1.9 |

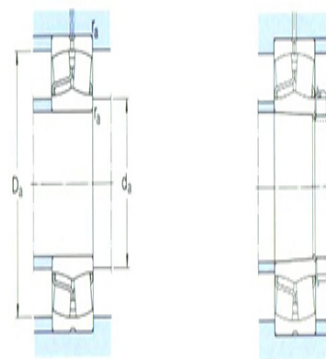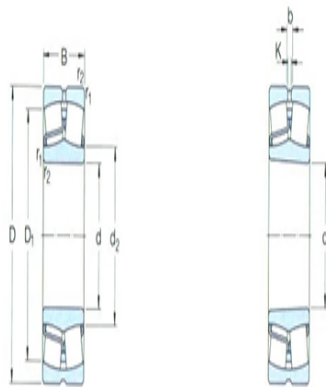

| | |
|-----|-----|
| Y2: | 2.9 |
| Y0: | 1.8 |