



**Model: 24132CCK30/W33**

Basic size of  
 mm

d:	160
D:	270
B:	109

The basic rated load is  
 kN

trends C:	1180
static state Co:	1760
Fatigue load limit	163
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	1400
limit speed:	1900
quality:	25

model

Column hole:	*24132CC/W33
conical bore:	*24132CCK30/W33
	3

Dimensions are  
 mm



d:	160
d <sub>2</sub> ~ :	181
D1 ~ :	228
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	172
Da the max:	258
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.4
----	-----

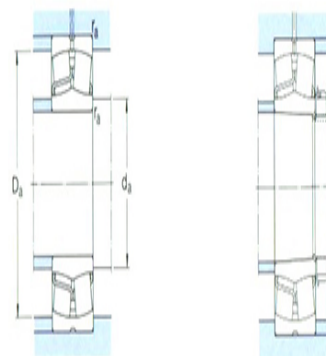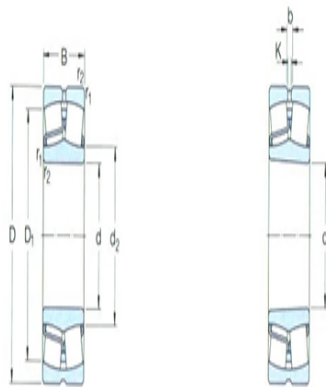

Y1:	1.7
Y2:	2.5
Y0:	1.6