



Model: 22232CCK/W33

Basic size of
 mm

d:	160
D:	290
B:	80

The basic rated load is
 kN


trends C:	1000
static state Co:	1290
Fatigue load limit Pu:	118

Rated rotation speed is
 r/min

Refer to the speed:	2000
limit speed:	2800
quality:	22.5


model

Column hole:	*22232CC/W33
conical bore:	*22232CCK/W33

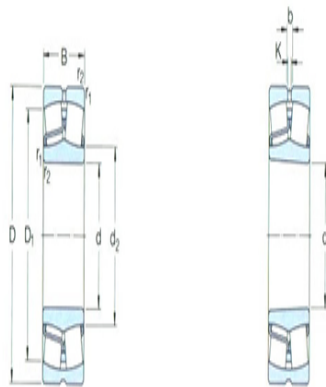

Dimensions are
 mm

d:	160
d ₂ ~ :	191
D1 ~ :	250
b:	13.9
k:	7.5
r _{1,2} the min:	3

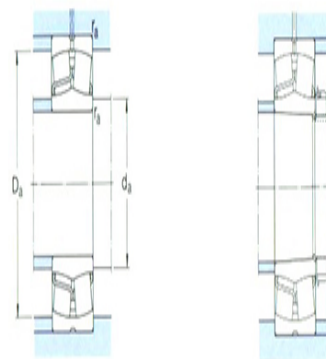

Shoulder gear and chamfer size
 mm

d _a the min:	174
Da the max:	276
r _a the max:	2.5

Calculation coefficient

e:	0.26
Y1:	2.6

Y2:	3.9
Y0:	2.5