



Model: 23232CCK/W33

Basic size of
 mm

| | |
|----|-----|
| d: | 160 |
| D: | 290 |
| B: | 104 |

The basic rated load is
 kN

| | |
|------------------------|------|
| trends C: | 1220 |
| static state Co: | 1660 |
| Fatigue load limit Pu: | 153 |

Rated rotation speed is
 r/min

| | |
|---------------------|------|
| Refer to the speed: | 1500 |
| limit speed: | 2200 |
| quality: | 31 |

model

| | |
|---------------|---------------|
| Column hole: | *23232CC/W33 |
| conical bore: | *23232CCK/W33 |

Dimensions are
 mm



| | |
|---------------------------|------|
| d: | 160 |
| d ₂ ~ : | 188 |
| D1 ~ : | 244 |
| b: | 13.9 |
| k: | 7.5 |
| r _{1,2} the min: | 3 |

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|-----|
| d _a the min: | 174 |
| Da the max: | 276 |
| r _a the max: | 2.5 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.35 |
| Y1: | 1.9 |

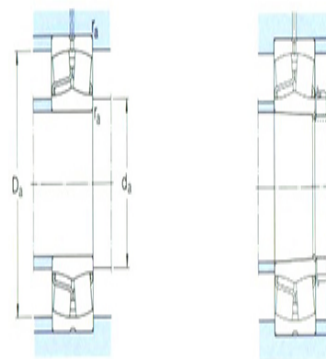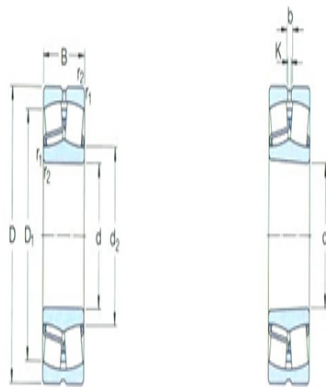

| | |
|-----|-----|
| Y2: | 2.9 |
| Y0: | 1.8 |