



Model: 22332CCK/W33

Basic size of
 mm

d:	160
D:	340
B:	114

The basic rated load is
 kN

trends C:	1600
static state Co:	1960
Fatigue load limit Pu:	160

Rated rotation speed is
 r/min

Refer to the speed:	1500
limit speed:	1900
quality:	52

model

Column hole:	*22332CC/W33
conical bore:	*22332CCK/W33

Dimensions are
 mm



d:	160
d ₂ ~ :	200
D1 ~ :	282
b:	16.7
k:	9
r _{1,2} the min:	4

Shoulder gear and chamfer size
 mm

d _a the min:	177
Da the max:	323
r _a the max:	3

Calculation coefficient

e:	0.35
Y1:	1.9

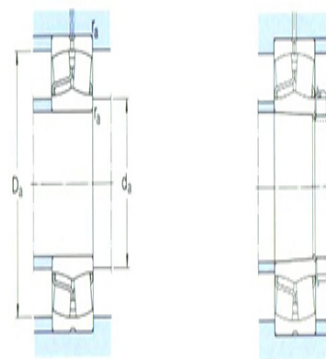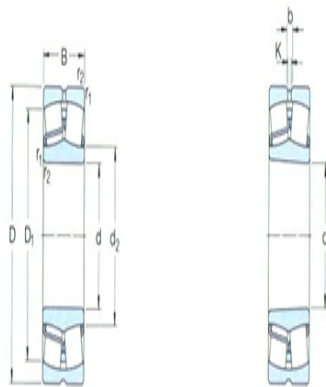

Y2:	2.9
Y0:	1.8