



Model: 24134CCK30/W33

Basic size of
 mm

d:	170
D:	280
B:	109

The basic rated load is
 kN

trends C:	1220
static state Co:	1860
Fatigue load limit	170
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	1300
limit speed:	1900
quality:	27.5

model

Column hole:	*24134CC/W33
conical bore:	*24134CCK30/W3 3

Dimensions are
 mm



d:	170
d ₂ ~ :	190
D1 ~ :	237
b:	8.3
k:	4.5
r _{1,2} the min:	2.1

Shoulder gear and chamfer size
 mm

d _a the min:	182
Da the max:	268
r _a the max:	2

Calculation coefficient

e:	0.37
----	------

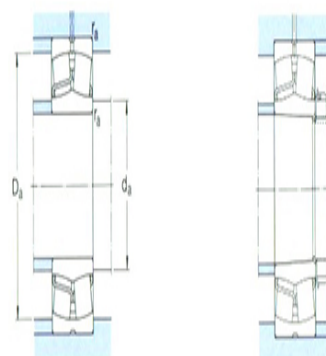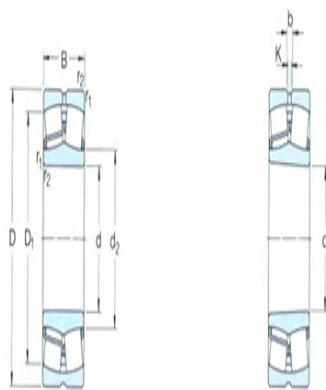

Y1:	1.8
Y2:	2.7
Y0:	1.8