



**Model: 22234CCK/W33**

Basic size of  
 mm

d:	170
D:	310
B:	86

The basic rated load is  
 kN

trends C:	1120
static state Co:	1460
Fatigue load limit Pu:	132

Rated rotation speed is  
 r/min

Refer to the speed:	1900
limit speed:	2600
quality:	28.5

model

Column hole:	*22234CC/W33
conical bore:	*22234CCK/W33

Dimensions are  
 mm



d:	170
d <sub>2</sub> ~ :	203
D1 ~ :	267
b:	16.7
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	187
Da the max:	293
r <sub>a</sub> the max:	3

Calculation coefficient

e:	0.27
Y1:	2.5

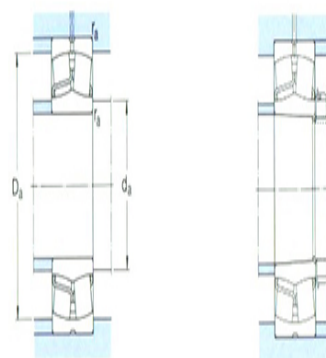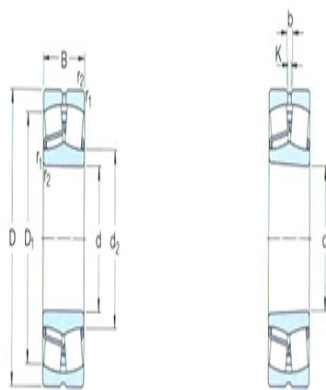

Y2:	3.7
Y0:	2.5