



Model: 23936CCK/W33

Basic size of
 mm

| | |
|----|-----|
| d: | 180 |
| D: | 250 |
| B: | 52 |

The basic rated load is
 kN

| | |
|------------------------|------|
| trends C: | 431 |
| static state Co: | 830 |
| Fatigue load limit Pu: | 76.5 |

Rated rotation speed is
 r/min

| | |
|---------------------|------|
| Refer to the speed: | 2200 |
| limit speed: | 2800 |
| quality: | 7.9 |

model

| | |
|---------------|--------------|
| Column hole: | 23936CC/W33 |
| conical bore: | 23936CCK/W33 |

Dimensions are
 mm



| | |
|---------------------------|-----|
| d: | 180 |
| d ₂ ~ : | 199 |
| D1 ~ : | 231 |
| b: | 5.5 |
| k: | 3 |
| r _{1,2} the min: | 2 |

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|-----|
| d _a the min: | 189 |
| Da the max: | 241 |
| r _a the max: | 2 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.18 |
| Y1: | 3.8 |

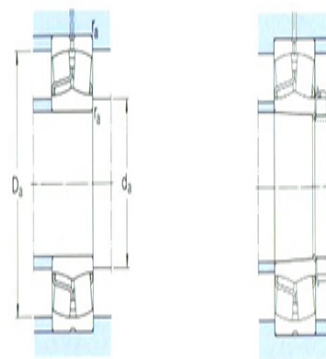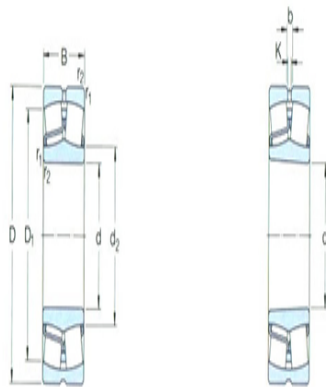

| | |
|-----|-----|
| Y2: | 5.6 |
| Y0: | 3.6 |