



Model: 23236CCK/W33

Basic size of
mm

| | |
|----|-----|
| d: | 180 |
| D: | 320 |
| B: | 112 |

The basic rated load is
kN

| | |
|------------------------|------|
| trends C: | 1500 |
| static state Co: | 2120 |
| Fatigue load limit Pu: | 186 |

Rated rotation speed is
r/min

| | |
|---------------------|------|
| Refer to the speed: | 1300 |
| limit speed: | 1900 |
| quality: | 39.5 |

model

| | |
|---------------|---------------|
| Column hole: | *23236CC/W33 |
| conical bore: | *23236CCK/W33 |

Dimensions are
mm



| | |
|---------------------------|------|
| d: | 180 |
| d ₂ ~ : | 211 |
| D1 ~ : | 271 |
| b: | 13.9 |
| k: | 7.5 |
| r _{1,2} the min: | 4 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|-----|
| d _a the min: | 197 |
| Da the max: | 303 |
| r _a the max: | 3 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.35 |
| Y1: | 1.9 |

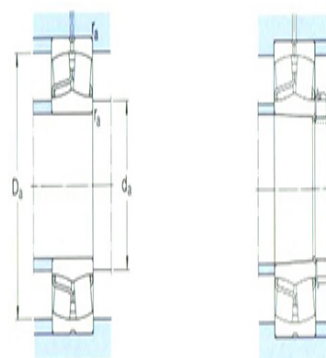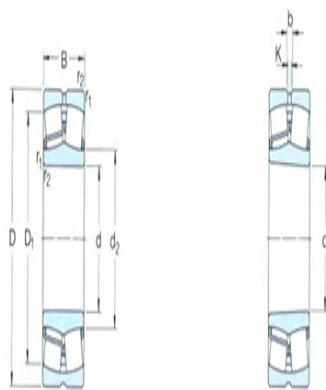

| | |
|-----|-----|
| Y2: | 2.9 |
| Y0: | 1.8 |