



Model: 23938CCK/W33

Basic size of  
mm

d:	190
D:	260
B:	52

The basic rated load is  
kN


trends C:	414
static state Co:	800
Fatigue load limit Pu:	76.5

Rated rotation speed is  
r/min

Refer to the speed:	2200
limit speed:	2600
quality:	8.3


model

Column hole:	23938CC/W33
conical bore:	23938CCK/W3 3

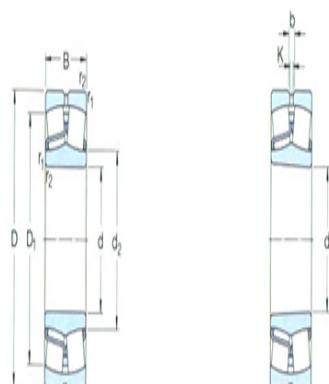

Dimensions are  
mm

d:	190
$d_2 \sim :$	209
$D_1 \sim :$	240
b:	5.5
k:	3
$r_{1,2} \text{ the min:}$	2

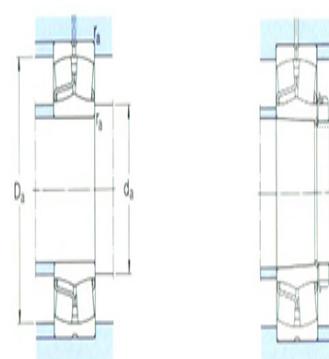

Shoulder gear and chamfer size  
mm

$d_a \text{ the min:}$	199
$D_a \text{ the max:}$	251
$r_a \text{ the max:}$	2

Calculation coefficient

e:	0.16
Y1:	4.2

Y2: 6.3

Y0: 4