



**Model: 24038CCK30/W33**

Basic size of  
 mm

d:	190
D:	290
B:	100

The basic rated load is  
 kN

trends C:	1120
static state Co:	1800
Fatigue load limit	163
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	1400
limit speed:	2000
quality:	24.5

model

Column hole:	*24038CC/W33
conical bore:	*24038CCK30/W33
	3

Dimensions are  
 mm



d:	190
d <sub>2</sub> ~ :	210
D1 ~ :	253
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	201
Da the max:	279
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.31
----	------

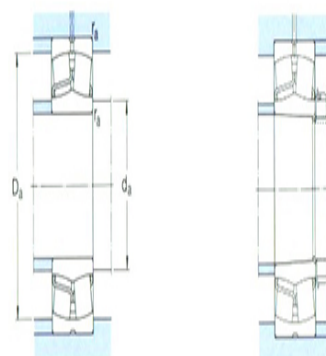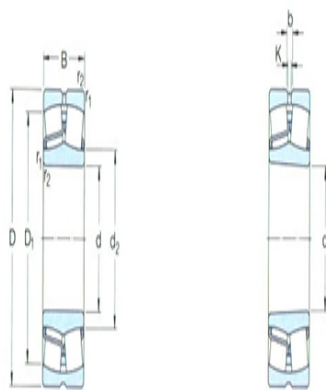

Y1:	2.2
Y2:	3.3
Y0:	2.2