



Model: 23138CCK/W33

Basic size of
 mm

| | |
|----|-----|
| d: | 190 |
| D: | 320 |
| B: | 104 |

The basic rated load is
 kN


| | |
|------------------------|------|
| trends C: | 1370 |
| static state Co: | 2080 |
| Fatigue load limit Pu: | 183 |

Rated rotation speed is
 r/min

| | |
|---------------------|------|
| Refer to the speed: | 1500 |
| limit speed: | 2000 |
| quality: | 35 |


model

| | |
|---------------|---------------|
| Column hole: | *23138CC/W33 |
| conical bore: | *23138CCK/W33 |

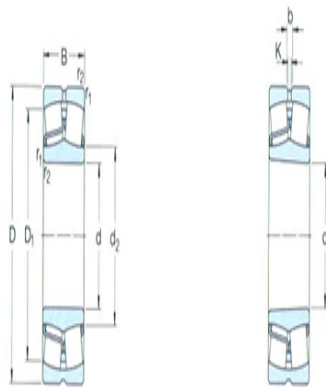

Dimensions are
 mm

| | |
|---------------------------|------|
| d: | 190 |
| d ₂ ~ : | 220 |
| D1 ~ : | 275 |
| b: | 13.9 |
| k: | 7.5 |
| r _{1,2} the min: | 3 |

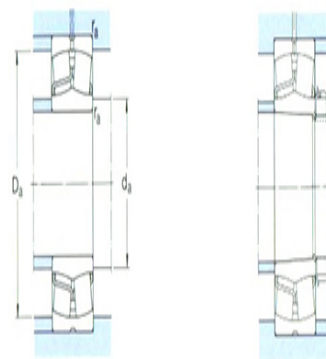

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|-----|
| d _a the min: | 204 |
| Da the max: | 306 |
| r _a the max: | 2.5 |

Calculation coefficient

| | |
|-----|------|
| e: | 0.31 |
| Y1: | 2.2 |

| | |
|-----|-----|
| Y2: | 3.3 |
| Y0: | 2.2 |