



**Model: 24138CCK30/W33**

Basic size of  
mm

d:	190
D:	320
B:	128

The basic rated load is  
kN

trends C:	1600
static state Co:	2500
Fatigue load limit	212
Pu:	

Rated rotation speed is  
r/min

Refer to the speed:	1200
limit speed:	1600
quality:	43

model

Column hole:	*24138CC/W33
conical bore:	*24138CCK30/W33
	3

Dimensions are  
mm



d:	190
d <sub>2</sub> ~ :	215
D1 ~ :	268
b:	11.1
k:	6
r <sub>1,2</sub> the min:	3

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	204
Da the max:	306
r <sub>a</sub> the max:	2.5

Calculation coefficient

e:	0.4
----	-----

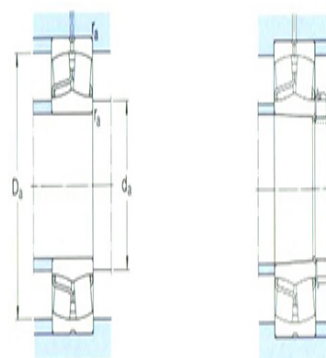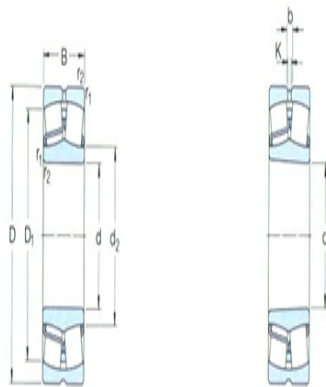

Y1:	1.7
Y2:	2.5
Y0:	1.6