



**Model: 23940CC/W33**

Basic size of  
 mm

d:	200
D:	280
B:	60

The basic rated load is  
 kN



trends C:	546
static state Co:	1040
Fatigue load limit Pu:	93

Rated rotation speed is  
 r/min

Refer to the speed:	2000
limit speed:	2400
quality:	11.5

model

Column hole:	23940CC/W33
conical bore:	23940CCK/W33

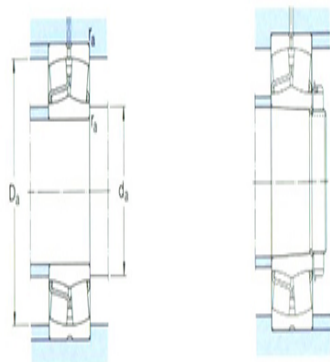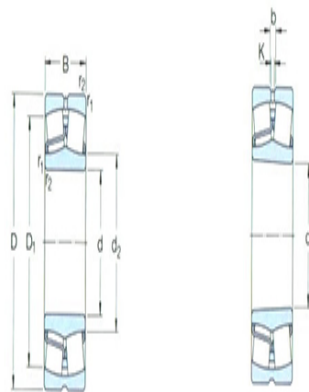

Dimensions are  
 mm

d:	200
d <sub>2</sub> ~ :	222
D1 ~ :	258
b:	8.3
k:	4.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	211
Da the max:	269
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.19
Y1:	3.6

Y2:	5.3
Y0:	3.6