



Model: 23940CC/W33

Basic size of
mm

d:	200
D:	280
B:	60

The basic rated load is
kN


trends C:	546
static state Co:	1040
Fatigue load limit Pu:	93

Rated rotation speed is
r/min

Refer to the speed:	2000
limit speed:	2400
quality:	11.5


model

Column hole:	23940CC/W33
conical bore:	23940CCK/W3 3

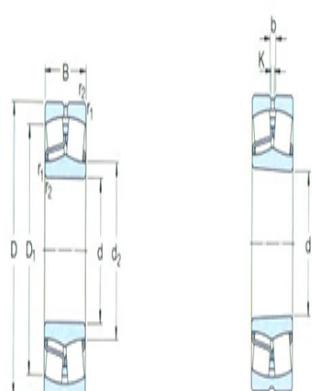

Dimensions are
mm

d:	200
$d_2 \sim :$	222
$D_1 \sim :$	258
b:	8.3
k:	4.5
$r_{1,2}$ the min:	2.1

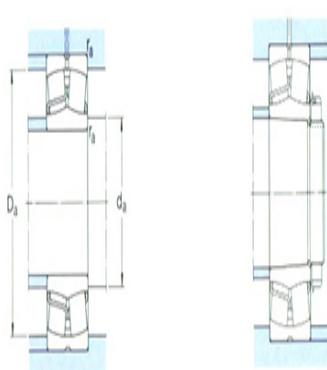

Shoulder gear and chamfer size
mm

d_a the min:	211
D_a the max:	269
r_a the max:	2

Calculation coefficient

e:	0.19
Y1:	3.6

Y2:	5.3
Y0:	3.6