



### Model: 23040CC/W33

Basic size of  
 mm

d:	200
D:	310
B:	82

The basic rated load is  
 kN

trends C:	1000
static state Co:	1530
Fatigue load limit Pu:	137

Rated rotation speed is  
 r/min

Refer to the speed:	1800
limit speed:	2200
quality:	23.3

model

Column hole:	*23040CC/W33
conical bore:	*23040CCK/W33

Dimensions are  
 mm



d:	200
d <sub>2</sub> ~ :	228
D1 ~ :	278
b:	13.9
k:	7.5
r <sub>1,2</sub> the min:	2.1

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	211
Da the max:	299
r <sub>a</sub> the max:	2

Calculation coefficient

e:	0.24
Y1:	2.8

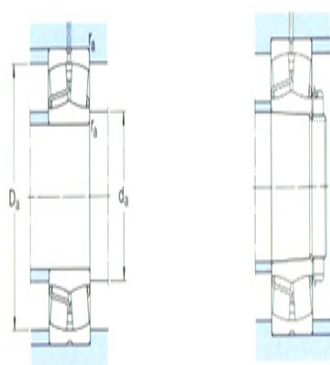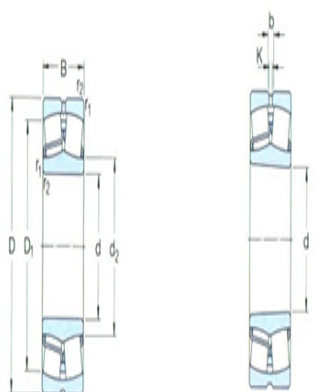

Y2:	4.2
Y0:	2.8