



Model: 23140CC/W33

Basic size of
mm

d:	200
D:	340
B:	112

The basic rated load is
kN


trends C:	1600
static state Co:	2360
Fatigue load limit Pu:	204

Rated rotation speed is
r/min

Refer to the speed:	1500
limit speed:	1900
quality:	43


model

Column hole:	*23140CC/W33
conical bore:	*23140CCK/W3 3

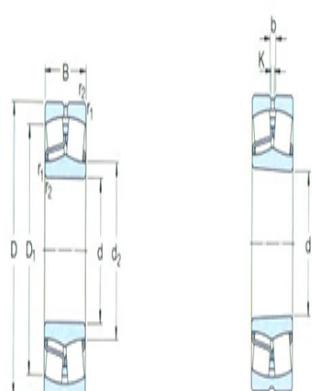

Dimensions are
mm

d:	200
$d_2 \sim :$	231
$D_1 \sim :$	293
b:	16.7
k:	9
$r_{1,2} \text{ the min:}$	3

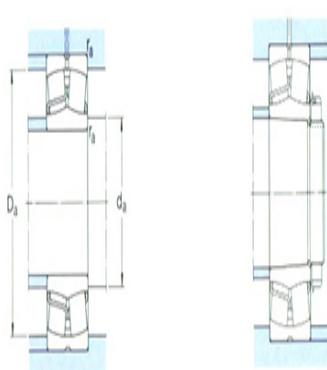

Shoulder gear and chamfer size
mm

$d_a \text{ the min:}$	214
$D_a \text{ the max:}$	326
$r_a \text{ the max:}$	2.5

Calculation coefficient

e:	0.31
Y1:	2.2

Y2:	3.3
Y0:	2.2