



### Model: 24140CC/W33

Basic size of  
mm

d:	200
D:	340
B:	140

The basic rated load is  
kN

trends C:	1800
static state Co:	2800
Fatigue load limit	232
Pu:	

Rated rotation speed is  
r/min

Refer to the speed:	1100
limit speed:	1500
quality:	53.5

model

Column hole:	*24140CC/W33
conical bore:	*24140CCK30/W33

Dimensions are  
mm



d:	200
d <sub>2</sub> ~ :	226
D1 ~ :	284
b:	11.1
k:	6
r <sub>1,2</sub> the min:	3

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	214
Da the max:	326
r <sub>a</sub> the max:	2.5

Calculation coefficient

e:	0.4
----	-----

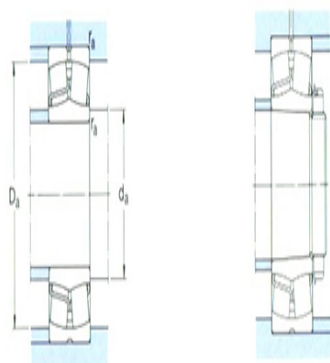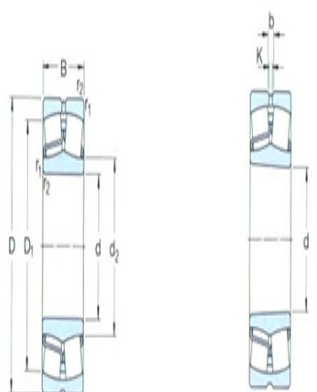

Y1:	1.7
Y2:	2.5
Y0:	1.6