



**Model: 22240CC/W33**

Basic size of  
 mm

d:	200
D:	360
B:	98

The basic rated load is  
 kN



trends C:	1460
static state Co:	1930
Fatigue load limit Pu:	166

Rated rotation speed is  
 r/min

Refer to the speed:	1600
limit speed:	2200
quality:	43.5

model

Column hole:	*22240CC/W33
conical bore:	*22240CCK/W33

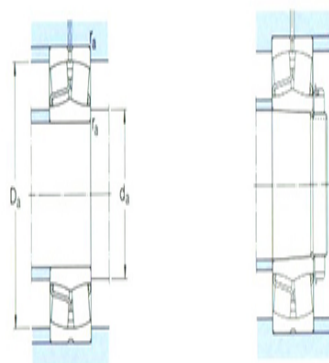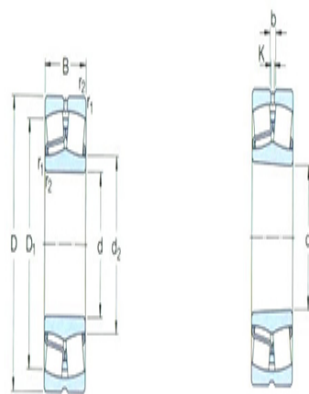

Dimensions are  
 mm

d:	200
d <sub>2</sub> ~ :	238
D1 ~ :	313
b:	16.7
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	217
Da the max:	343
r <sub>a</sub> the max:	3

Calculation coefficient

e:	0.26
Y1:	2.6

Y2:	3.9
Y0:	2.5