



**Model: 23044CC/W33**

Basic size of  
 mm

d:	220
D:	340
B:	90

The basic rated load is  
 kN



trends C:	1220
static state Co:	1860
Fatigue load limit Pu:	163

Rated rotation speed is  
 r/min

Refer to the speed:	1600
limit speed:	2000
quality:	30.5

model

Column hole:	*23044CC/W33
conical bore:	*23044CCK/W33

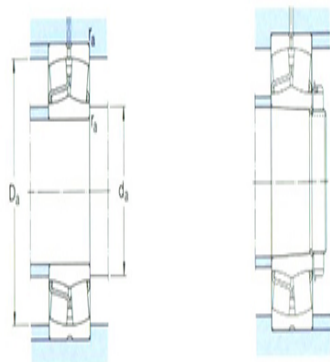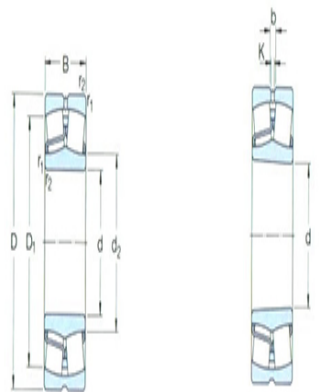

Dimensions are  
 mm

d:	220
d <sub>2</sub> ~ :	250
D1 ~ :	306
b:	13.9
k:	7.5
r <sub>1,2</sub> the min:	3

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	233
Da the max:	327
r <sub>a</sub> the max:	2.5

Calculation coefficient

e:	0.24
Y1:	2.8

Y2:	4.2
Y0:	2.8