



Model: 24044CC/W33

Basic size of
 mm

d:	220
D:	340
B:	118

The basic rated load is
 kN

trends C:	1560
static state Co:	2600
Fatigue load limit	212
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	1200
limit speed:	1700
quality:	40

model

Column hole:	*24044CC/W33
conical bore:	*24044CCK30/W33
	3

Dimensions are
 mm



d:	220
d ₂ ~ :	244
D1 ~ :	295
b:	11.1
k:	6
r _{1,2} the min:	3

Shoulder gear and chamfer size
 mm

d _a the min:	233
Da the max:	327
r _a the max:	2.5

Calculation coefficient

e:	0.33
----	------

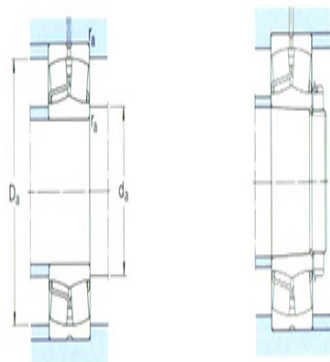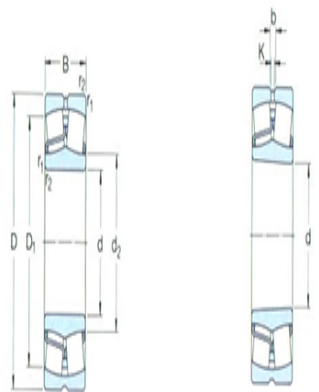

Y1:	2
Y2:	3
Y0:	2