



Model: 23244CC/W33

Basic size of
mm

d:	220
D:	400
B:	144

The basic rated load is
kN



trends C:	2360
static state Co:	3450
Fatigue load limit Pu:	285

Rated rotation speed is
r/min

Refer to the speed:	1100
limit speed:	1500
quality:	81.5

model

Column hole:	*23244CC/W33
conical bore:	*23244CCK/W33

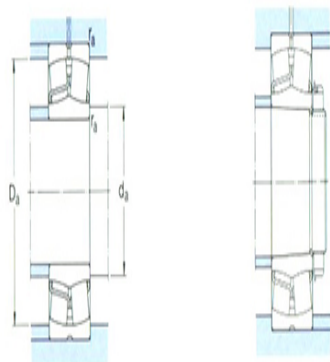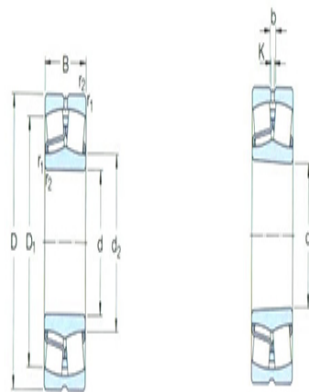

Dimensions are
mm

d:	220
d ₂ ~ :	259
D1 ~ :	338
b:	16.7
k:	9
r _{1,2} the min:	4

Shoulder gear and chamfer size
mm

d _a the min:	237
Da the max:	383
r _a the max:	3

Calculation coefficient

e:	0.35
Y1:	1.9

Y2:	2.9
Y0:	1.8