



**Model: 23148CC/W33**

Basic size of  
mm

d:	240
D:	400
B:	128

The basic rated load is  
kN



trends C:	2080
static state Co:	3200
Fatigue load limit Pu:	255

Rated rotation speed is  
r/min

Refer to the speed:	1200
limit speed:	1600
quality:	66.5

model

Column hole:	*23148CC/W33
conical bore:	*23148CCK/W33

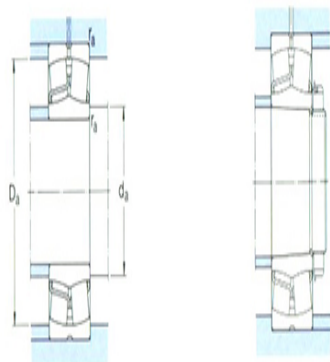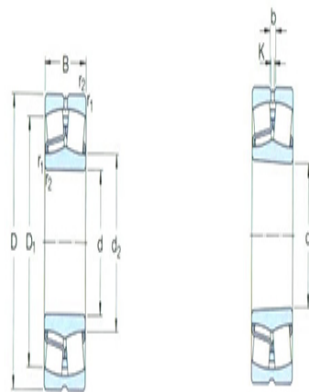

Dimensions are  
mm

d:	240
d <sub>2</sub> ~ :	277
D1 ~ :	348
b:	16.7
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	257
Da the max:	383
r <sub>a</sub> the max:	3

Calculation coefficient

e:	0.3
Y1:	2.3

Y2:	3.4
Y0:	2.2