



**Model: 24148CC/W33**

Basic size of  
 mm

d:	240
D:	400
B:	160

The basic rated load is  
 kN

trends C:	2400
static state Co:	3900
Fatigue load limit	320
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	900
limit speed:	1300
quality:	83

model

Column hole:	*24148CC/W33
conical bore:	*24148CCK30/W3 3

Dimensions are  
 mm



d:	240
d <sub>2</sub> ~ :	271
D1 ~ :	336
b:	11.1
k:	6
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	257
Da the max:	383
r <sub>a</sub> the max:	3

Calculation coefficient

e:	0.4
----	-----

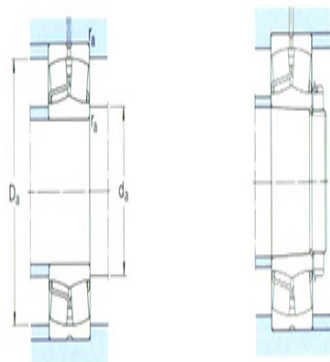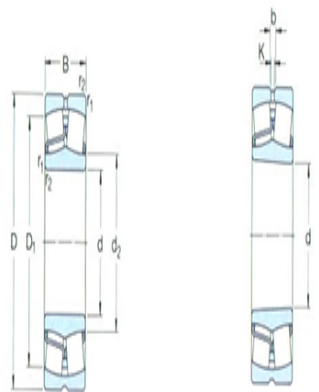

Y1:	1.7
Y2:	2.5
Y0:	1.6