



Model: 22248CC/W33

Basic size of
 mm

d:	240
D:	440
B:	120

The basic rated load is
 kN

trends C:	2200
static state Co:	3000
Fatigue load limit Pu:	245

Rated rotation speed is
 r/min

Refer to the speed:	1300
limit speed:	1800
quality:	83

model

Column hole:	*22248CC/W33
conical bore:	*22248CCK/W33

Dimensions are
 mm



d:	240
d ₂ ~ :	290
D1 ~ :	383
b:	22.3
k:	12
r _{1,2} the min:	4

Shoulder gear and chamfer size
 mm

d _a the min:	257
Da the max:	423
r _a the max:	3

Calculation coefficient

e:	0.27
Y1:	2.5

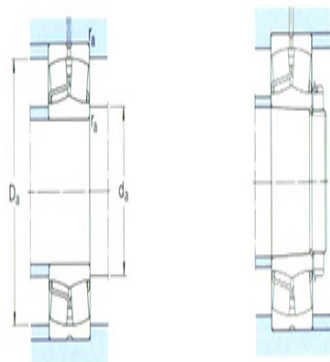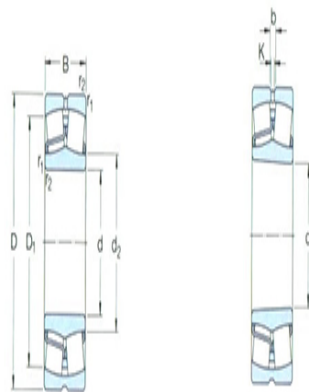

Y2:	3.7
Y0:	2.5