



**Model: 22348CC/W33**

Basic size of  
mm

d:	240
D:	500
B:	155

The basic rated load is  
kN



trends C:	3100
static state Co:	4000
Fatigue load limit Pu:	290

Rated rotation speed is  
r/min

Refer to the speed:	950
limit speed:	1300
quality:	155

model

Column hole:	*22348CC/W33
conical bore:	*22348CCK/W33

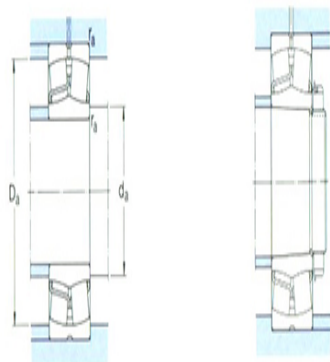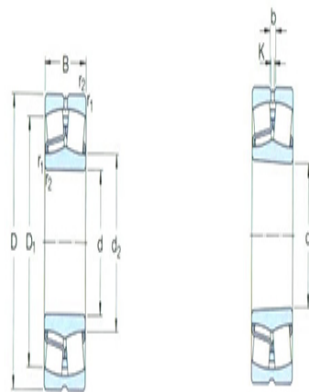

Dimensions are  
mm

d:	240
d <sub>2</sub> ~ :	303
D1 ~ :	423
b:	22.3
k:	12
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	260
Da the max:	480
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.31
Y1:	2.2

Y2:	3.3
Y0:	2.2