



Model: 24052CC/W33

Basic size of
 mm

d:	260
D:	400
B:	140

The basic rated load is
 kN

trends C:	2040
static state Co:	3450
Fatigue load limit	285
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	1000
limit speed:	1400
quality:	65.5

model

Column hole:	*24052CC/W33
conical bore:	*24052CCK30/W33

Dimensions are
 mm



d:	260
d ₂ ~ :	289
D1 ~ :	347
b:	11.1
k:	6
r _{1,2} the min:	4

Shoulder gear and chamfer size
 mm

d _a the min:	275
Da the max:	385
r _a the max:	3

Calculation coefficient

e:	0.33
----	------

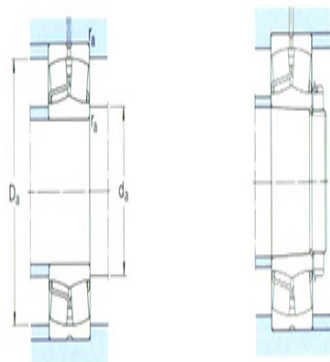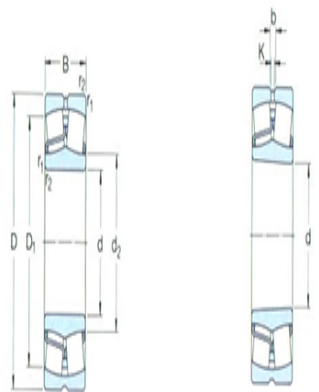

Y1:	2
Y2:	3
Y0:	2