



Model: 23040CCK/W33

Basic size of
mm

d:	200
D:	310
B:	82

The basic rated load is
kN



trends C:	1000
static state Co:	1530
Fatigue load limit Pu:	137

Rated rotation speed is
r/min

Refer to the speed:	1800
limit speed:	2200
quality:	23.3

model

Column hole:	*23040CC/W33
conical bore:	*23040CCK/W33

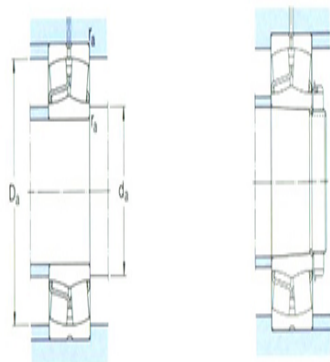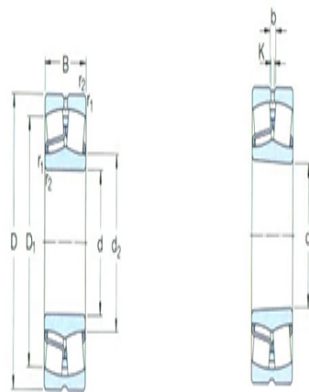

Dimensions are
mm

d:	200
d ₂ ~ :	228
D1 ~ :	278
b:	13.9
k:	7.5
r _{1,2} the min:	2.1

Shoulder gear and chamfer size
mm

d _a the min:	211
Da the max:	299
r _a the max:	2

Calculation coefficient

e:	0.24
Y1:	2.8

Y2:	4.2
Y0:	2.8