



**Model: 24044CCK30/W33**

Basic size of  
 mm

d:	220
D:	340
B:	118

The basic rated load is  
 kN

trends C:	1560
static state Co:	2600
Fatigue load limit	212
Pu:	

Rated rotation speed is  
 r/min

Refer to the speed:	1200
limit speed:	1700
quality:	40

model

Column hole:	*24044CC/W33
conical bore:	*24044CCK30/W33
	3

Dimensions are  
 mm



d:	220
d <sub>2</sub> ~ :	244
D1 ~ :	295
b:	11.1
k:	6
r <sub>1,2</sub> the min:	3

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	233
Da the max:	327
r <sub>a</sub> the max:	2.5

Calculation coefficient

e:	0.33
----	------

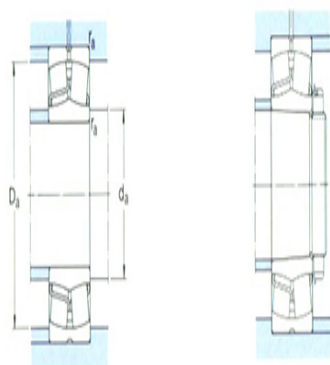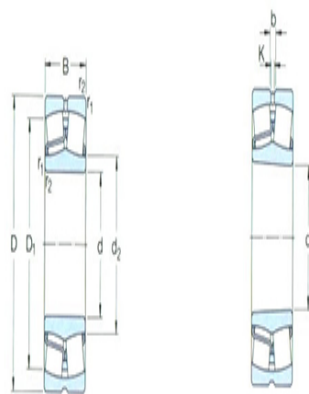

Y1:	2
Y2:	3
Y0:	2