



Model: 24144CCK30/W33

Basic size of
 mm

d:	220
D:	370
B:	150

The basic rated load is
 kN

trends C:	2120
static state Co:	3350
Fatigue load limit	285
Pu:	

Rated rotation speed is
 r/min

Refer to the speed:	1000
limit speed:	1400
quality:	67

model

Column hole:	*24144CC/W33
conical bore:	*24144CCK30/W33
	3

Dimensions are
 mm



d:	220
d ₂ ~ :	248
D1 ~ :	310
b:	11.1
k:	6
r _{1,2} the min:	4

Shoulder gear and chamfer size
 mm

d _a the min:	237
Da the max:	353
r _a the max:	3

Calculation coefficient

e:	0.4
----	-----

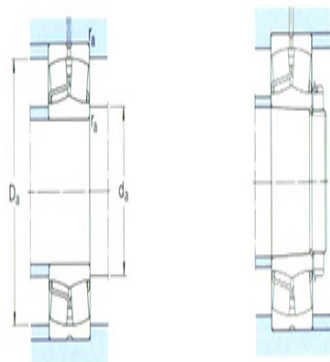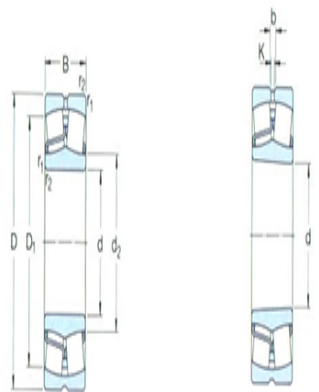

Y1:	1.7
Y2:	2.5
Y0:	1.6