



**Model: 22244CCK/W33**

Basic size of  
 mm

d:	220
D:	400
B:	108

The basic rated load is  
 kN



trends C:	1760
static state Co:	2360
Fatigue load limit Pu:	196

Rated rotation speed is  
 r/min

Refer to the speed:	1500
limit speed:	2000
quality:	60.5

model

Column hole:	*22244CC/W33
conical bore:	*22244CCK/W33

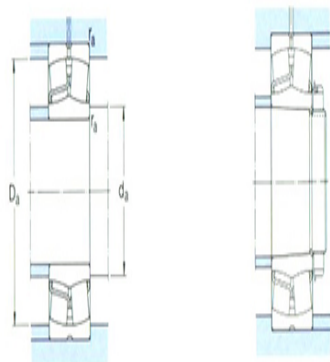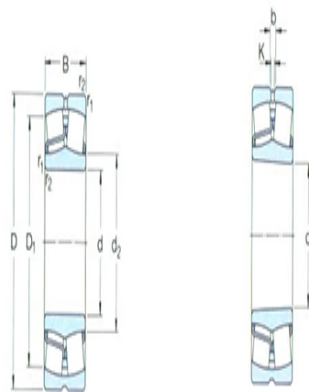

Dimensions are  
 mm

d:	220
d <sub>2</sub> ~ :	263
D1 ~ :	346
b:	16.7
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	237
Da the max:	383
r <sub>a</sub> the max:	3

Calculation coefficient

e:	0.27
Y1:	2.5

Y2:	3.7
Y0:	2.5