



**Model: 23244CCK/W33**

Basic size of  
 mm

d:	220
D:	400
B:	144

The basic rated load is  
 kN


trends C:	2360
static state Co:	3450
Fatigue load limit Pu:	285

Rated rotation speed is  
 r/min

Refer to the speed:	1100
limit speed:	1500
quality:	81.5

model

Column hole:	*23244CC/W33
conical bore:	*23244CCK/W33

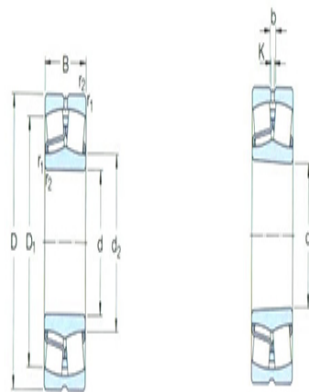


Dimensions are  
 mm

d:	220
d <sub>2</sub> ~ :	259
D1 ~ :	338
b:	16.7
k:	9
r <sub>1,2</sub> the min:	4

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	237
Da the max:	383
r <sub>a</sub> the max:	3

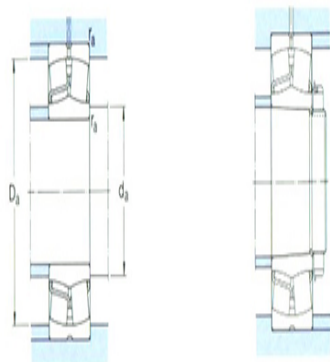

Calculation coefficient

e:	0.35
Y1:	1.9

Y2:	2.9
Y0:	1.8