



Model: 23948CCK/W33

Basic size of
mm

d:	240
D:	320
B:	60

The basic rated load is
kN


trends C:	564
static state Co:	1160
Fatigue load limit Pu:	98

Rated rotation speed is
r/min

Refer to the speed:	1700
limit speed:	2000
quality:	13.5

model

Column hole:	23948CC/W33
conical bore:	23948CCK/W33

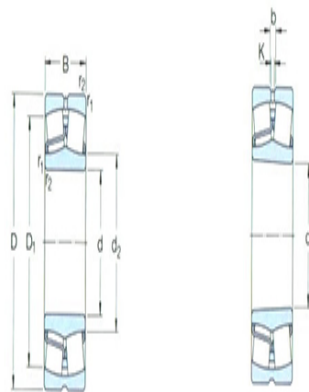

Dimensions are
mm


d:	240
d ₂ ~ :	261
D1 ~ :	298
b:	8.3
k:	4.5
r _{1,2} the min:	2.1

Shoulder gear and chamfer size
mm

d _a the min:	251
Da the max:	309
r _a the max:	2

Calculation coefficient

e:	0.15
Y1:	4.5

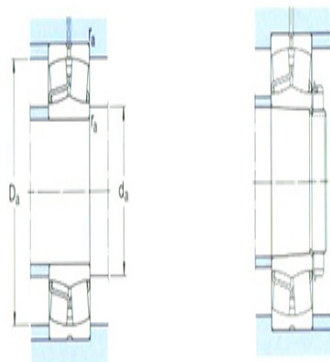

Y2:	6.7
Y0:	4.5