



Model: 24152CCK30/W33

Basic size of
mm

d:	260
D:	440
B:	180

The basic rated load is
kN

trends C:	3000
static state Co:	4800
Fatigue load limit	380
Pu:	

Rated rotation speed is
r/min

Refer to the speed:	850
limit speed:	1200
quality:	110

model

Column hole:	*24152CC/W33
conical bore:	*24152CCK30/W33
	3

Dimensions are
mm



d:	260
d ₂ ~ :	293
D1 ~ :	368
b:	13.9
k:	7.5
r _{1,2} the min:	4

Shoulder gear and chamfer size
mm

d _a the min:	277
Da the max:	423
r _a the max:	3

Calculation coefficient

e:	0.4
----	-----

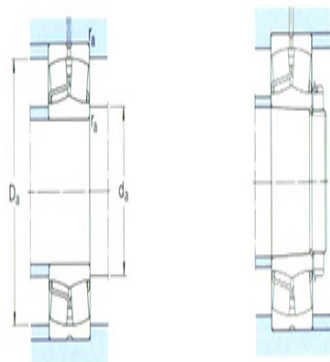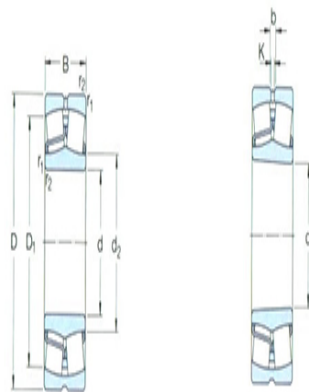

Y1:	1.7
Y2:	2.5
Y0:	1.6