



**Model: 22252CCK/W33**

Basic size of  
mm

d:	260
D:	480
B:	130

The basic rated load is  
kN



trends C:	2650
static state Co:	3550
Fatigue load limit Pu:	285

Rated rotation speed is  
r/min

Refer to the speed:	1200
limit speed:	1600
quality:	110

model

Column hole:	*22252CC/W33
conical bore:	*22252CCK/W33

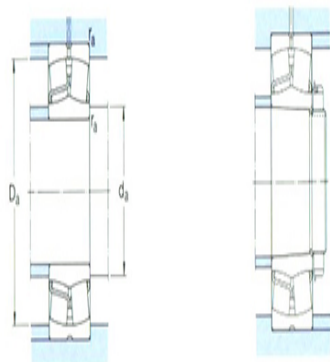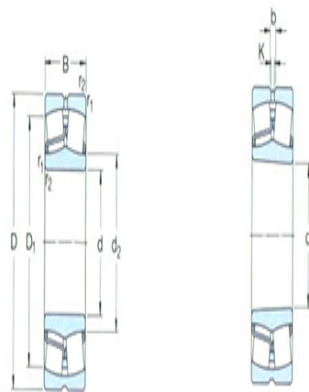

Dimensions are  
mm

d:	260
d <sub>2</sub> ~ :	311
D1 ~ :	421
b:	22.3
k:	12
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	280
Da the max:	460
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.27
Y1:	2.5

Y2:	3.7
Y0:	2.5