



**Model: 23252CCK/W33**

Basic size of  
 mm

d:	260
D:	480
B:	174

The basic rated load is  
 kN

trends C:	3250
static state Co:	4750
Fatigue load limit Pu:	360

Rated rotation speed is  
 r/min

Refer to the speed:	850
limit speed:	1200
quality:	140

model

Column hole:	*23252CC/W33
conical bore:	*23252CCK/W33

Dimensions are  
 mm



d:	260
d <sub>2</sub> ~ :	312
D1 ~ :	408
b:	22.3
k:	12
r <sub>1,2</sub> the min:	5

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	280
Da the max:	460
r <sub>a</sub> the max:	4

Calculation coefficient

e:	0.35
Y1:	1.9

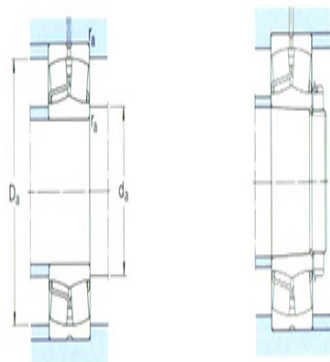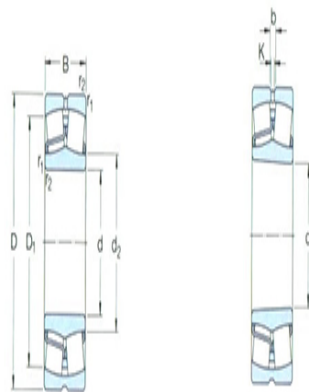

Y2:	2.9
Y0:	1.8