



Model: 23160CC/W33

Basic size of
 mm

| | |
|----|-----|
| d: | 300 |
| D: | 500 |
| B: | 160 |

The basic rated load is
 kN

| | |
|------------------------|------|
| trends C: | 3200 |
| static state Co: | 5100 |
| Fatigue load limit Pu: | 380 |

Rated rotation speed is
 r/min

| | |
|---------------------|------|
| Refer to the speed: | 950 |
| limit speed: | 1200 |
| quality: | 125 |

model

| | |
|---------------|---------------|
| Column hole: | *23160CC/W33 |
| conical bore: | *23160CCK/W33 |

Dimensions are
 mm



| | |
|---------------------------|------|
| d: | 300 |
| d ₂ ~ : | 345 |
| D1 ~ : | 434 |
| b: | 16.7 |
| k: | 9 |
| r _{1,2} the min: | 5 |

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|-----|
| d _a the min: | 320 |
| Da the max: | 480 |
| r _a the max: | 4 |

Calculation coefficient

| | |
|-----|-----|
| e: | 0.3 |
| Y1: | 2.3 |

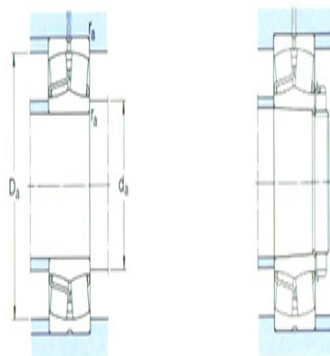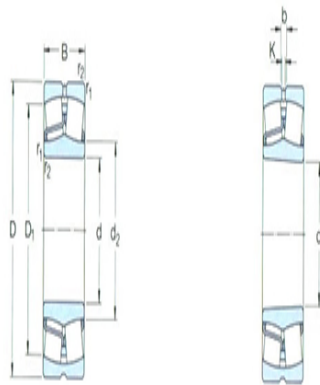

| | |
|-----|-----|
| Y2: | 3.4 |
| Y0: | 2.2 |